

Multipurpose R200 Drip And Rain Test Chamber, IPX1-4 Waterproof Test Chamber

Our Product Introduction

for more products please visit us on raintestchambers.com

Basic Information

- Place of Origin: Guangdong , China
- Brand Name: YueXin
- Certification: ISO 20653:2013, DIN 40050-9:1993, IEC60529:2013,VW 80000:2017 LV124 K-10
- Model Number: YX-IPX14B-R200
- Minimum Order Quantity: 1 pcs
- Price: usd+20000-50000+pcs
- Packaging Details: wooden box package
- Delivery Time: 30-45 days
- Payment Terms: T/T
- Supply Ability: 100+pcs+30



Product Specification

- Test Function: IPX1 IPX2 IPX3 IPX4
- Experimental Scenarios: Drip、 Rain、 Splash Water
- Turn Table Diameter: 200mm
- Commodity Name: IP Grade Climatic Chamber , IPX1-4 Waterproof Testing Machine
- Rotating Speed: 1-5 Rounds Per Minute
- Turn Table Load Bearing: 20KG
- Turn Table Lifting Height: 150 To 250mm (from Table Surface To Internal Bottom)
- Controller: 7-inch Touch Screen + PLC
- Highlight: **Drip And Rain Test Chamber, Multipurpose Drip Test Chamber, IP Waterproof Test Chamber**



Product Description

Multipurpose R200 Drip And Rain Test Chamber, IPX1-4 Waterproof Test Chamber

General specifications:

Dimension	Outer : Approx W 950×D 680×H 1500 (mm); Inner : W 500×D 500×H 650 (mm)
Material	External : steel plate; Internal : 304 stainless steel
Power supply	220V/50HZ
Power	1.0kW

Product structure:

This IPX1-4 comprehensive waterproof test chamber is applicable for the waterproof rating tests of IPX1, IPX2, IPX3, and IPX4. It is equipped with a built-in water storage tank so that the test water can be recycled, which is environmentally friendly and energy-saving.

There is a water storage tank inside the equipment and a water level control system. When the water is full, it will prompt, and when it is short of water, it will alarm.

The sample power socket (220V, 10A) is mounted on the right wall of the inner box, which is convenient for the user to do the live test of the sample; and after the sample is powered on, the turntable rotation will be automatically adjusted to forward and reverse rotation to prevent winding⁵.

A protective cover is installed at the bottom of the drip tank to prevent body from being hurt by the nozzle during operation.

The equipment uses a high-quality servo motor to drive the swing tube, so that the swing angle is more precise and the noise is low.

The flow rate is manually adjusted with a glass flow meter⁶.

There is a waterproof lighting inside, which is convenient for users to observe the test situation.

Test time: 0-999min⁷.

Controller: 7-inch touch screen + PLC, using Yuexin self-developed software, which can be switched to multiple languages⁸.

Protection measures: short circuit protection, water shortage alert.

Technical data for IPX1/2:

Item	Parameter
Drip area	200×200mm
Diameter of nozzles	0.4mm
Distance between nozzles	20mm
Water flow(IPX1) ⁹	40-60 mL/min
Water flow(IPX2)	120-140 mL/min
Drip distance ¹⁰	200mm

Technical data for IPX3/4:

Item	Parameter
Radius of swivel tube	R200
Diameter of swivel tube	400mm
Internal diameter of swivel tube	15mm
Internal diameter of nozzle	0.4mm
Number of nozzles of swivel tube	12
Distance between nozzles	50mm
Speed of rotation of the swivel tube	60 degree/s
Swing pipe angle	IPX3:120°; IPX4:350°
Water volume flow	(IPX3) 0.56 L/min
Water volume flow	(IPX4) 0.84 L/min
Flow error range	±5%
Flow meter range	0-2.0 L
Water pressure	Not adjustable (pressure gauge display)
Power supply	220V/50HZ
Power	1.0kW

Remark:

1 The pictures in this document are for customer reference only, and there may be color differences between the actual model and the pictures.

2 This document only lists some test standards, which does not mean that other test requirements and standards cannot be conducted. Welcome to communicate and discuss with us.

3 One test only at the same time. The next project can be only carried out after the current test is completed. In addition, we can provide multi-functional customized test solutions according to user requirements.

4 Standard load-bearing upper limit of turntable is 20kg, but also can be customized per requirements.


5 Please inform in advance if the voltage(220V) does not match the actual needs so that we can provide customized solutions for you.

6 This model is adjusted by a flowmeter, and the upper surface of the float is aligned with the scale to read the data; if you need to export the test data, you can choose a flow sensor. When reading the flowmeter, the second digit after the decimal point is the estimated reading data, not accurate data; if the user is concerned about the accuracy of the data, a flow sensor can be selected through negotiation.

7 It is recommended to set the test time according to the test standard. The water temperature will rise due to long time test which has an impact on the test results.

- 8 At present, only Chinese and English interfaces are supported; if other languages are introduced, the software can be updated remotely.
- 9 The data is calculated based on the dripping area, $IPX1:0.2 \times 0.2 \times (0.001 \sim 0.0015) = 0.00004 \sim 0.00006 \text{ m}^3/\text{min}$ (that is $0.36 \sim 0.54 \text{ L/min}$ / $40 \sim 60 \text{ mL/min}$).
- 10 200mm is the distance from the nozzle to the sample specified in the standard, and the user needs to adjust the height of the turntable to meet the distance requirement.
- 11 The user needs to prepare an air compressor in advance (recommended gas storage capacity > 10L). If you need us to buy it on your behalf, you need to explain in advance.
- 12 The photos may not match the actual ones, and are for user reference only.

The product image:

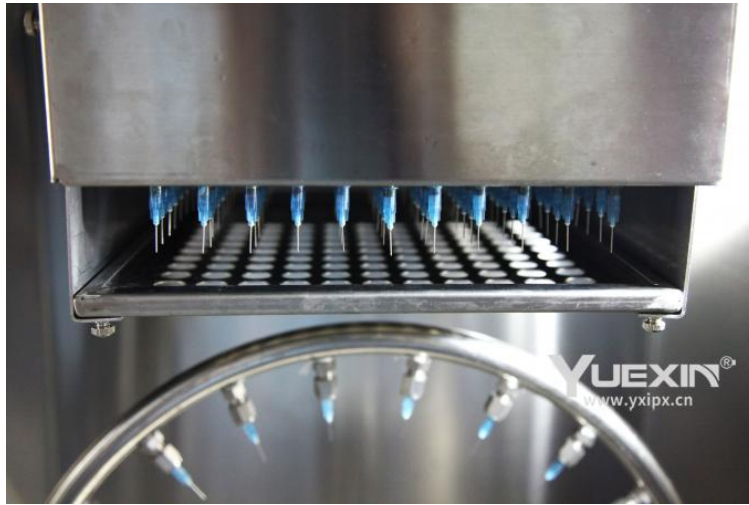

protective cover

Tags: IPX1-4 Waterproof Grade Test Chamber , Water Drip and Rain Spray Testing Machine , Waterproof Test Equipment

YUEXIN 裕信 **Guangzhou Yuexin Test Equipment Co., Ltd.**



18122303372



mft@yxipx.com



raintestchambers.com

101, No.3, Jiangjunzi Road, Dalong Street, Panyu District, Guangzhou City China