



R1400 mm Simple Swing Pipe Water Spray Test Chamber 220V 50HZ With Flow Sensor

Our Product Introduction

Basic Information

- Place of Origin: Guangdong , China
- Brand Name: YueXin
- Certification: ISO 20653:2013, DIN 40050-9:1993, IEC60529:2013 VW 80000:2017 LV124 K-10
- Model Number: YX-IPX34CHE-R1400
- Minimum Order Quantity: 1 pcs
- Price: usd+20000-50000+pcs
- Packaging Details: wooden box package
- Delivery Time: 30-45 days
- Payment Terms: T/T
- Supply Ability: 100+pcs+30



Product Specification

- Product Type: Water Spray Test Chamber
- IP Code: IPX3 IPX4
- Experimental Environmrnt: Rain / Splash Water
- Rotating Speed: 1-5 Rounds Per Minute
- Radius Of Swivel Tube: R600mm - R1600mm
- Turntable Diameter: 800mm
- Designation: Swing Pipe Rain Test Apparatus , Waterproof Testing Machine
- Turn Table Load Bearing: 50KG
- Highlight: **Water Spray Test Chamber 220V , Water Spray Test Chamber 50HZ**

for more products please visit us on raintestchambers.com

Product Description

IPX3 IPX4 R1400 mm Simple Swing Pipe Water Spray Test Device with Flow Sensor

General specifications:

Outward Dimension	L2800*W800*H2000
Material	304 stainless steel
Power supply	220V/50HZ
Power	1.0kW

The main product information:

The rain simulation apparatus, featuring a solitary oscillating tube capable of a $\pm 90^\circ$ swing arc, facilitates meticulous swing regulation, ideal for gadgets necessitating targeted water-resistance evaluation. Furthermore, its integration of precision flow sensors renders it a cost-conscious alternative in select testing scenarios vis-à-vis pricier flow measurement devices.

The counterweight is added at the bottom of the case to lower the center of gravity of the case and make the device more stable when swinging.

There is a water storage tank inside the equipment and a water level control system. When it is short of water, it will alarm.

The sample power socket (220V, 10A) is mounted under the control cabinet, which is convenient for the user to do the live test of the sample;

and after the sample is powered on, the turntable rotation will be automatically adjusted to forward and reverse rotation to prevent winding ⁵.

The swing tube is driven by a servo motor, with precise swing angle and low noise.

Controller: 7-inch touch screen + PLC, using Yuexin self-developed software, which can be switched to multiple languages⁶.

Stainless steel counterweights are added at both ends of the swing tube to improve the fluency of swing and reduce the shaking range of the swing tube.

Universal casters are mounted on the bottom, which has good load-bearing and easy to move and fix the equipment.

Protection measures: short circuit protection, water shortage alert.

Standard features:

Item	Specification
Radius of swivel tube ⁷	R1400
Diameter of swivel tube	2800mm
Internal diameter of swivel tube	15mm
Internal diameter of nozzle	0.4mm
Number of nozzles of swivel tube	See remark ⁸
Distance between nozzles	50mm
Test time	0-999min
Speed of rotation of the swivel tube	60 degree/s
Swing pipe angle	$\pm 90^\circ$
Water volume flow	IPX3: 4.1(L/min) ; IPX4: 6.1(L/min)
Water pressure	Not adjustable (pressure gauge display)
Power	1.0kW

Service scene:

Excelling as the preferred choice for simulating rainfall on extensive products, the Swing Nozzle Rain Test Machine adeptly assesses the resistance to water, sealing efficiency, and endurance of numerous products, including car components, outdoor electronic devices, and building materials. With a multitude of models available, it fulfills a vast array of testing specifications, offering unparalleled flexibility.

Remark:

1 The pictures in this document are for customer reference only, and there may be color differences between the actual model and the pictures.

2 This document only lists some test standards, which does not mean that other test requirements and standards cannot be conducted. Welcome to communicate and discuss with us.

3 One test only at the same time. The next project can be only carried out after the current test is completed. In addition, we can provide multi-functional customized test solutions according to user requirements.

4 Standard load-bearing upper limit of turntable is 50kg, but also can be customized per requirements.

5 Please inform in advance if the voltage(220V) does not match the actual needs so that we can provide customized solutions for you.

6 At present, only Chinese and English interfaces are supported; if other languages are introduced, the software can be updated remotely.

7 The swing pipe can be equipped with a variety of specifications, which can be selected according to the sample size range (satisfying the spray distance <200mm), please confirm clearly before placing an order.

8 The specifications of swing pipe for IPX3/4 rain test, as shown in the figure below:


**Table 9 – Total water flow rate q_v under IPX3 and IPX4 test conditions –
Mean flow rate per hole $q_{v1} = 0,07$ l/min**

Tube radius <i>R</i> mm	Degree IPX3		Degree IPX4	
	Number of open holes <i>N</i> ¹⁾	Total water flow q_v l/min	Number of open holes <i>N</i> ¹⁾	Total water flow q_v l/min
200	8	0,56	12	0,84
400	16	1,1	25	1,8
600	25	1,8	37	2,6
800	33	2,3	50	3,5
1 000	41	2,9	62	4,3
1 200	50	3,5	75	5,3
1 400	58	4,1	87	6,1
1 600	67	4,7	100	7,0

¹⁾ Depending on the actual arrangement of the hole centres at the specified distance, the number of open holes *N* may be increased by 1.

9 The photos may not match the actual ones, and are for user reference only.

Detail images:

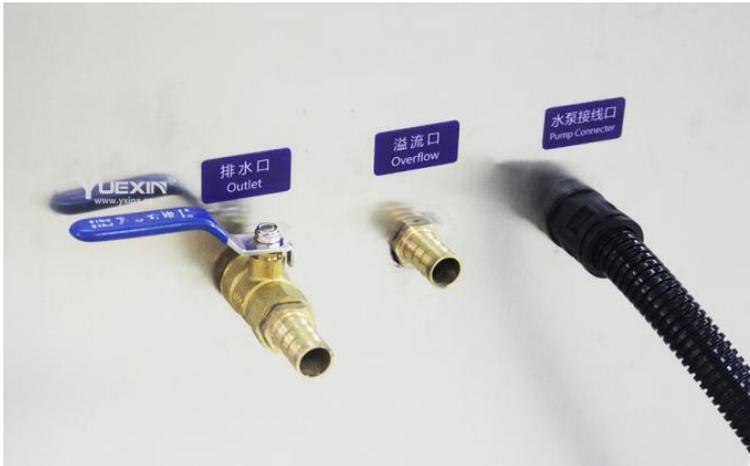

outlet, overflow and pump connecter

Tags: Waterproof Testing Device, Rain Spray Apparatus for IPX3 IPX4, Rain Spray Test Machine

YUEXIN® Guangzhou Yuexin Test Equipment Co., Ltd.

☎ 18122303372 ✉ mft@yxipx.com 🌐 raintestchambers.com

101, No.3, Jiangjunzi Road, Dalong Street, Panyu District, Guangzhou City China