


IPX5 IPX6 Spontaneous Side-spraying 1200L Water Jet Testing Chamber

Our Product Introduction

Basic Information

- Place of Origin: Guangdong , China
- Brand Name: YueXin
- Certification: ISO 20653:2013, DIN 40050-9:1993, IEC60529:2013 VW 80000:2017 LV124 K-10
- Model Number: YX-IPX56BS-1200L
- Minimum Order Quantity: 1 pcs
- Price: usd+20000-50000+pcs
- Packaging Details: wooden box package
- Delivery Time: 30-45 days
- Payment Terms: T/T
- Supply Ability: 100+pcs+30

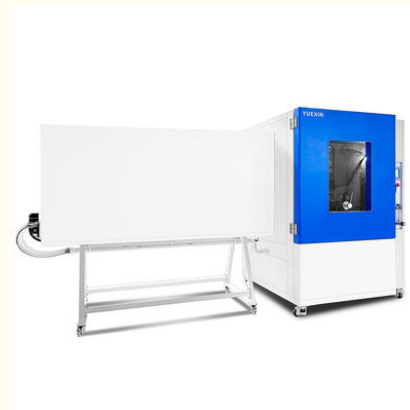

Product Specification

- Controller: 7-inch Touch Screen + PLC
- Description: Rain Test Chamber, Water Jet Detection
- Turn Table Diameter: 400mm
- Turn Table Load Bearing: 50KG
- IP Grade: IPX5 IPX6
- Rotating Speed: 1-5 Rounds Per Minute
- Inspection Window: Tempered Glass
- Operating Scene: Water Spray、 Powerful Water Spray
- Highlight: ipx5 water jet testing machine,
ipx6 water jet testing machine,
ipx6 ipx5-6 water jet test machine



for more products please visit us on raintestchambers.com

Product Description

IPX5 IPX6 Spontaneous Side-spraying 1200L Water Jet Testing Chamber

General specifications:

Size	Outer: Approx W 4040×D 1220×H 1820 (mm); Inner: W 1000×D 1000×H 1000 (mm)
Material	External: steel plate; Internal: 304 stainless steel
Power supply	380V/50HZ
Power	2.0kW

Product information:

The IPX5 IPX6 automatic side-spray water jet test device surpasses the conventional manual one in water spray test chambers by providing a wider range of effective spray and a superior spraying quality. Furthermore, its sophisticated automation and intelligence technology empower users to achieve precise spraying with just a few simple settings, subsequently lessening operational complexities and augmenting work efficiency.

Two spray modes: up and down sweeping water spray and fixed water spray⁵.

The sample power socket (220V, 10A) is mounted on the right wall of the inner box, which is convenient for the user to do the live test of the sample; and after the sample is powered on, the turntable rotation will be automatically adjusted to forward and reverse rotation to prevent winding⁶.

There is a waterproof lighting inside, which is convenient for users to observe the test situation.

Controller: 7-inch touch screen + PLC, using Yuexin self-developed software, which can be switched to multiple languages⁷.

Test time setting: 0-999min⁸.

Universal casters are mounted on the bottom, which has good load-bearing and easy to move and fix the equipment.

Protection measures: short circuit protection, water shortage alert and door open alert⁹.

Usage scenario:

The IPX56 spray testing machine is widely used for the waterproof performance testing of electronic products, lighting fixtures, auto parts, electrical appliances, cabinets, smart wearables, etc., and it is an important equipment for improving product quality.

Standard features:

Item	Parameters
Diameter of Nozzles	IPX5 : 6.3mm; IPX6 : 12.5mm
Water flow	IPX5 : 12.5±0.625 L/min; IPX6 : 100.0±5 L/min
Flow control ¹⁰	Manual adjustment with flow meter
Water pressure	Not adjustable (pressure gauge display)
Spray distance ¹¹	2.7m
Spray height ¹²	800mm
Nozzle swing speed	0-20 cycle/min
Power supply	380V/50HZ
Power	2.0kW

Notices:

1 The pictures in this document are for customer reference only, and there may be color differences between the actual model and the pictures.

2 One test only at the same time. The next project can be only carried out after the current test is completed. In addition, we can provide multi-functional customized test solutions according to user requirements.

3 This document only lists some test standards, which does not mean that other test requirements and standards cannot be conducted. Welcome to communicate and discuss with us.

4 Standard load-bearing upper limit of turntable is 50kg, but also can be customized per requirements.

5 If the sample height exceeds 150mm, it is recommended to choose the swing spray method.

6 Please inform in advance if the voltage(220V) does not match the actual needs so that we can provide customized solutions for you.

7 At present, only Chinese and English interfaces are supported; if other languages are introduced, the software can be updated remotely.

8 It is recommended to set the test time according to the test standard. The water temperature will rise due to long time test which has an impact on the test results.

9 Door open alert: when the door is open, the test cannot be conducted to protect personnel from being drenched in water.

10 The standard model is adjusted by a flowmeter, and the upper surface of the float is aligned with the scale to read the data; if you need to export the test data, you can choose a flow sensor.

11 This distance is the range from the nozzle to the center of the turntable. If the user wants to extend the spraying distance, he needs to explain in advance.

12 Since the IPX5 water spray is in a parabolic shape, the water spray range will be lower than this height, and the measured maximum water spray height is close to 700mm.

13 The photos may not match the actual ones, and are for user reference only.

Product image:



flow meter

Tags: Water Jet Test Machine, IPX5 IPX6 Rain Test Chamber, Water Jet Test Chamber



Guangzhou Yuexin Test Equipment Co., Ltd.



18122303372



mft@yxipx.com



raintestchambers.com

101, No.3, Jiangjunzi Road, Dalong Street, Panyu District, Guangzhou City China