

## Compliant Standard R600 IPX3-9K Rain Test Instrument With Low Noise Work

Our Product Introduction

### Basic Information

- Place of Origin: Guangdong , China
- Brand Name: YueXin
- Certification: ISO 20653:2013, DIN 40050-9:1993, IEC60529:2013 VW 80000:2017 LV124 K-10
- Model Number: YX-IPX39BS-R600
- Minimum Order Quantity: 1 pcs
- Price: usd+20000-50000+pcs
- Packaging Details: wooden box package
- Delivery Time: 30-45 days
- Payment Terms: T/T
- Supply Ability: 100+pcs+30



### Product Specification

- Type: IPX3 IPX4 IPX5 IPX6 IPX9 IPX4K IPX6K IPX9K
- Controller: 7-inch Touch Screen + PLC
- Commodity Name: Comprehensive Testing Machine
- Diameter Of Detachable Turntable: 600mm
- Window Materia: Tempered Glass
- Service Environment: Rain / Splash Water / Water Spray / Powerful Water Spray、 High Temperature And High Pressure Steam Jet
- Rotating Speed: 1-5 Rounds Per Minute
- Turn Table Load Bearing: 40KG
- Highlight: **IPX3-9K Rain Test Instrument,  
Compliant Standard Rain Test Instrument,  
Low Noise Rain Test Instrument**

for more products please visit us on [raintestchambers.com](http://raintestchambers.com)

## Product Description

### Compliant Standard R600 IPX3-9K Rain Test Instrument with Low Noise Work

#### General specifications:

Dimension	Outer : L1750*W1480*H1950/ L400*W2400*H1700; Inner : W 1300×D 1300×H 1300(mm)
Material	External : steel plate; Internal : 304 stainless steel
Power supply	380V/50HZ
Power	18.0kw

#### Product presentation:

The IPX3-9K all-encompassing waterproof test chamber features an internal spray method, characterized by a focused spray direction. Ensuring all surfaces are adequately tested may involve rotating or repositioning the product at multiple angles. It is tailored for products requiring testing with precise spray angles or directions.

The equipment uses a high-quality servo motor to drive the swing tube, so that the swing angle is more precise and the noise is low.

For IPX5/6 testing, here are two spray modes: up and down sweeping water spray and fixed water spray<sup>5</sup> (Spray water from back to front).

The spray distance (IPX9/9K) can be adjusted manually to meet the standard (125±25mm).

The flow rate is automatically adjusted by an electronic flow sensor, and the flow data will be displayed on the touch screen in real time<sup>6</sup>.

The sample power socket (220V, 10A) is mounted on the right wall of the inner box, which is convenient for the user to do the live test of the sample; and after the sample is powered on, the turntable rotation will be automatically adjusted to forward and reverse rotation to prevent winding<sup>7</sup>.

Controller: 7-inch touch screen + PLC, using Yuexin self-developed software, which can be switched to multiple language<sup>8</sup>.

Test time setting: 0-999min<sup>9</sup>.

#### Usage:

The IPX3-9 water spray test chamber enjoys widespread application across electronics, home appliances, transportation, and various other industries. Specifically, IPX3 indicates protection against water sprays, making it ideal for outdoor devices and electrical appliances that operate in damp conditions, including outdoor speakers and automotive lighting. On the other hand, IPX9 stands for high-pressure, high-temperature water jet testing, tailored for industrial equipment in sectors such as food processing and medical equipment. Given its diverse range of applications, this test chamber is suitable for conducting waterproof tests in numerous scenarios.

#### Standard features for IPX3/4K:

Item	Parameter
Radius of swivel tube <sup>10</sup>	R600
Diameter of swivel tube	1200mm
Internal diameter of swivel tube	15mm
Internal diameter of nozzle	IPX3/4 : 0.4mm; IPX4K : 0.8mm
Number of nozzles of swivel tube	See remark <sup>11</sup>
Distance between nozzles	50mm
Speed of rotation of the swivel tube	60 degree/s
Swing pipe angle	IPX3 : 120°; IPX4/IPX4K : 350°
Water volume flow	IPX3(L/min) : 1.8 ; IPX4(L/min) : 2.6 ; IPX4K(L/min):15.0
Flow error range	±5%

#### Standard features for IPX5/6K:

Item	Parameter
Diameter of nozzles	IPX5,IPX6K : 6.3mm; IPX6 : 12.5mm
Water flow	IPX5 : 12.5±0.625 L/min IPX6 : 100.0±5.0L/min IPX6K : 75.0±3.75L/min
Spray distance <sup>14</sup>	2.7m
Spray direction	Spray from back to front
Spray height <sup>15</sup>	800mm
Nozzle swing speed	0-20 cycle/min

#### Standard features for IPX9K:

Item	Parameter
------	-----------

Spray distance	125±25mm
Number of nozzles	4
Nozzle angle	0°,30°,60°,90°
Water flow	14-16L/min
Flow control	Automatic adjustment
Storage tank temperature	80±5
Spray pressure	8000-10000Kpa
Water jet impact	0.9-1.2N
Test time	120 seconds, 30 seconds per position

**Remark:**

- 1 The pictures in this document are for customer reference only, and there may be color differences between the actual model and the pictures.
- 2 This document only lists some test standards, which does not mean that other test requirements and standards cannot be conducted. Welcome to communicate and discuss with us.
- 3 One test only at the same time. The next project can be only carried out after the current test is completed. In addition, we can provide multi-functional customized test solutions according to user requirements.
- 4 Standard load-bearing upper limit of turntable is 50kg, but also can be customized per requirements. Turntables of  $\phi 200\text{mm}$  are provided for replacement.
- 5 If the sample height exceeds 150mm, it is recommended to choose the swing spray method.
- 6 Use flow sensor to adjust water flow automatically, the flow is set according to the corresponding test options, and does not support custom settings.
- 7 Please inform in advance if the voltage(220V) does not match the actual needs so that we can provide customized solutions for you.
- 8 At present, only Chinese and English interfaces are supported; if other languages are introduced, the software can be updated remotely.
- 9 It is recommended to set the test time according to the test standard. The water temperature will rise due to long time test which has an impact on the test results.
- 10 Multiple specifications of pendulum tubes can be provided, please confirm clearly before placing an order; if other specifications are added after purchase, the equipment needs to be returned to the factory to replace hardware and programs.
- 11 The specifications of swing pipe for IPX3/4 rain test, as shown in the figure below:


**Table 9 – Total water flow  $q_v$  under IPX3 and IPX4 test conditions –  
Mean flow rate per hole  $q_{v1} = 0,07 \text{ l/min}$**

Tube radius $R$ mm	Degree IPX3		Degree IPX4	
	Number of open holes $N^{1)}$	Total water flow $q_v$ l/min	Number of open holes $N^{1)}$	Total water flow $q_v$ l/min
200	8	0,56	12	0,84
400	16	1,1	25	1,8
600	25	1,8	37	2,6
800	33	2,3	50	3,5
1 000	41	2,9	62	4,3
1 200	50	3,5	75	5,3
1 400	58	4,1	87	6,1
1 600	67	4,7	100	7,0

<sup>1)</sup> Depending on the actual arrangement of the hole centres at the specified distance, the number of open holes  $N$  may be increased by 1.

- 12 This distance is the range from the nozzle to the center of the turntable. If the user wants to extend the spraying distance, he needs to explain in advance.
- 13 Since the IPX5 water spray is in a parabolic shape, the water spray range will be lower than this height, and the measured maximum water spray height is close to 550mm.
- 14 The photos may not match the actual ones, and are for user reference only.

**Product detail photo:**

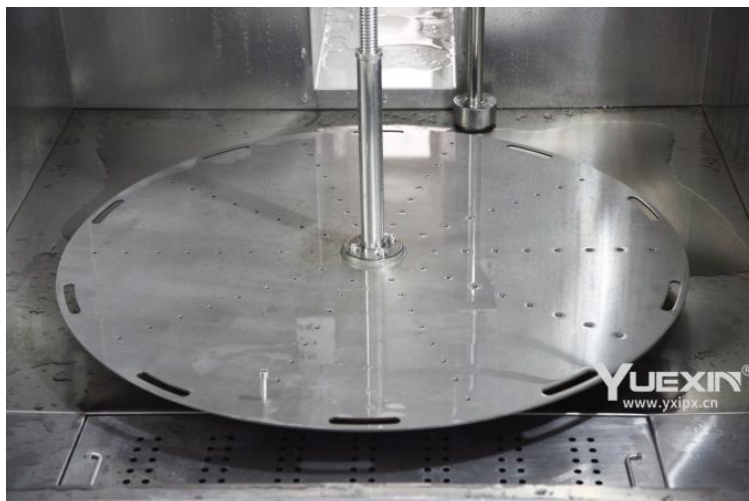

turntable

**Tags:** IP Waterproof Test Equipment , IP Grade Climatic Chamber , IPX3-9K Environmental Machine



**Guangzhou Yuexin Test Equipment Co., Ltd.**



18122303372



mft@yxipx.com



raintestchambers.com

101, No.3, Jiangjunzi Road, Dalong Street, Panyu District, Guangzhou City China