

## 30m IPX8 100L Water Immersion Testing Machine With Cylinder Opening Cover

Our Product Introduction

for more products please visit us on [raintestchambers.com](http://raintestchambers.com)

### Basic Information

- Place of Origin: Guangdong , China
- Brand Name: YueXin
- Certification: ISO 20653:2013, DIN 40050-9:1993, IEC60529:2013
- Model Number: YX-IPX8-30AC-100L
- Minimum Order Quantity: 1 pcs
- Price: usd+20000-50000+pcs
- Packaging Details: wooden box package
- Delivery Time: 30-45 days
- Payment Terms: T/T
- Supply Ability: 100+pcs+30



### Product Specification

- IP Grade: IPX8
- Test Scenario: Environment Of Long Term Immersion Up To A Specified Pressure
- Depth Range: 1-30m
- Material: 304 Stainless Steel
- Pressure Accuracy: 1 KPa
- Opening Method: Cylinder Drive
- Type: Button Type
- Product Name: Waterproof Immersion Soaking Test Chamber , Ipx8 Waterproof Test Equipment
- Volume: 100L
- Highlight: 100L Water Immersion Testing Machine , 30m Water Immersion Testing Machine , Water Immersion Testing Machine



### More Images



## Product Description

### 30m IPX8 100L Water Immersion Testing Machine with Cylinder Opening Cover

#### Product introduction:

The IPX8 immersion test equipment, featuring a 30-meter water pressure capability, is equipped with a button-style operation interface for ease of use. It utilizes pneumatic cylinders for lid opening, facilitating efficient and reliable access for placing and retrieving test samples. Designed for rigorous waterproof testing, this device ensures products can withstand extreme underwater conditions, meeting the highest standards of IPX8 certification.

The device is equipped with a pressure sensor, which can display the internal pressure change synchronously.

The tank cover is fastened with stainless steel can lid flange fasteners, and the seal is firm.

Timing is performed by a time relay, and timing starts after the internal pressure reaches the set value.


After the test is complete, the device automatically vents the pressure.

The tank cover is connected with a mechanical safety valve. If the set pressure exceeds the set pressure, the safety valve will release the pressure directly to ensure the safety of users.

The tank lid is lifted and lowered by cylinder driving to reduce operating pressure.

If the user needs to provide an external power supply for the sample, we can open a hole in the lid and provide a locking device (wire diameter <15mm)<sup>5</sup>.

#### Detail images:

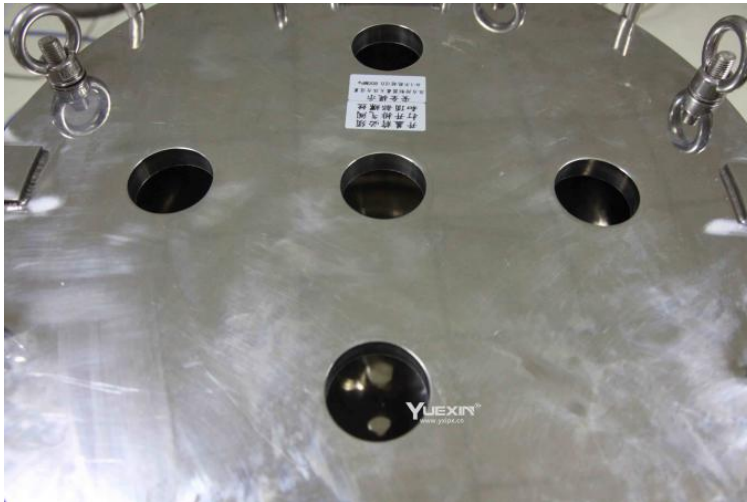

lid(punchable)

guide rod

#### Use scene:

The IPX8 Pressure Immersion Test Machine serves primarily to replicate diverse underwater depth conditions and assess the waterproof qualities of product casings. Its range of testing applications is vast, spanning electronic components, outdoor luminaires, automotive accessories, communication gadgets, drones, watches, and beyond. By utilizing compressed air to pressurize water, it mimics real-world underwater settings to verify the underwater functionality of products. This device finds utility across multiple industries and plays a crucial role in maintaining product quality.

#### General specifications:

Outer dimension	Approx W 810×D 730×H 1150 (mm)
Pressure accuracy	1 kPa
Power supply	220V/50Hz
Power	100w

### The technical data:

Item	Specification
Thickness of lid	15 mm
Flange thickness	20 mm
Tank thickness	3 mm
Equipment net weight	Approx 100 kg
pressure range	0-300 kPa
Water depth(maximum)	30 meters
Adjustment method	Automatic adjustment
Opening method	cylinder drive
Pressure accuracy	1 kPa
pressure error value	±2 kPa
Set pressure of safety valve	0.35 Mpa(350kPa)
Testing time <sup>6</sup>	0-999 s/min/h
power supply	220V/50Hz
power	100 w

### Remark:

- 1 The pictures in this document are for customer reference only, and there may be color differences between the actual model and the pictures.
- 2 This document only lists some test standards, which does not mean that other test requirements and standards cannot be conducted. Welcome to communicate and discuss with us.
- 3 One test only at the same time. The next project can be only carried out after the current test is completed. In addition, we can provide multi-functional customized test solutions according to user requirements.
- 4 The formula of the corresponding relationship between pressure and water depth:  $P=9.8d$  (Unit :kPa,m).
- 5 Please wear insulating gloves during power-on test to avoid personal safety problems.
- 6 The time unit of the test can be freely selected, and it can be adjusted through the time relay before starting the test.
- 7 The user needs to prepare an air compressor in advance (recommended gas storage capacity > 60L). If you need us to buy it on your behalf, you need to explain in advance.
- 8 The photos may not match the actual ones, and are for user reference only.

### About us:





**Tags:** Water immersion test equipment, IPX8 waterproof test equipment, Environmental testing machine

**YUEXIN®** Guangzhou Yuexin Test Equipment Co., Ltd.

☎ 18122303372    ✉ [mft@yxipx.com](mailto:mft@yxipx.com)    🌐 [raintestchambers.com](http://raintestchambers.com)

101, No.3, Jiangjunzi Road, Dalong Street, Panyu District, Guangzhou City China