

Visible 500L Water Jet Test Chamber, Eco-friendly Rain Tester for IPX5 IPX6

Our Product Introduction

for more products please visit us on raintestchambers.com

Basic Information

- Place of Origin: Guangdong , China
- Brand Name: YueXin
- Certification: ISO 20653:2013, DIN 40050-9:1993, IEC60529:2013 VW 80000:2017 LV124 K-10
- Model Number: YX-IPX56B-500L
- Minimum Order Quantity: 1 pcs
- Price: usd+20000-50000+pcs
- Packaging Details: wooden box package
- Delivery Time: 30-45 days
- Payment Terms: T/T
- Supply Ability: 100+pcs+30



Product Specification

- Product Title: Rain Test Chamber, Water Jet Test Machine
- Inside Dimension: W 600×D 600×H 600 (mm)
- Turn Table Diameter: 400mm
- Turn Table Load Bearing: 30KG
- IP Grade: IPX5 IPX6
- Rotating Speed: 1-5 Rounds Per Minute
- Usage Scenario: Water Spray、 Powerful Water Spray
- Controller: 7-inch Touch Screen + PLC
- Highlight: 500l water jet test chamber, 500l rain tester, ipx5 rain tester



More Images



Product Description

Visible 500L Water Jet Test Chamber, Eco-friendly Rain Tester for IPX5 IPX6

General specifications:

Dimension	Outward: Approx W 3750×D 1050×H 1600 (mm); Inward: W 800×D 800×H 800 (mm)
Material	External: steel plate Internal: 304 stainless steel
Power supply	380V/50HZ
Power	2.0kW

Product description:

In contrast to handheld spray guns, this product diminishes the reliance on manual labor while enabling water recycling, thereby cutting down operational expenses.

Spray angle can be adjusted manually.

There is a water storage tank inside the equipment and a water level control system. When the water is full, it will prompt, and when it is short of water, it will alarm.

The sample power socket (220V, 10A) is mounted on the right wall of the inner box, which is convenient for the user to do the live test of the sample; and after the sample is powered on, the turntable rotation will be automatically adjusted to forward and reverse rotation to prevent winding⁵.

There is a waterproof lighting inside, which is convenient for users to observe the test situation.

Controller: 7-inch touch screen + PLC, using Yuexin self-developed software, which can be switched to multiple language⁶.

Test time setting: 0-999min⁷.

Universal casters are mounted on the bottom, which has good load-bearing and easy to move and fix the equipment.

Protection measures: short circuit protection, water shortage alert.

Standard features:

Item	Specification
Diameter of Nozzles	IPX5 : 6.3mm; IPX6 : 12.5mm
Water flow	IPX5 : 12.5±0.625 L/min IPX6 : 100.0±5 L/min
Flow control ⁸	Manual adjustment with flow meter
Water pressure	Not adjustable (pressure gauge display)
Spray distance ⁹	2.7m
Nozzle angle	Fixed, manually adjustable
Turntable height	200mm (non-lifting)
Power supply	380V/50HZ
Power	2.0kW

Working scene:

The IPX56 spray chamber simulates extreme conditions like torrential rain and intense water sprays, guaranteeing products' seamless operation amidst diverse weather scenarios. Its application spans across waterproof testing of electronics, lighting, automotive components, appliances, enclosures, and smart wearable devices.

Notices:

1 The pictures in this document are for customer reference only, and there may be color differences between the actual model and the pictures.

2 This document only lists some test standards, which does not mean that other test requirements and standards cannot be conducted. Welcome to communicate and discuss with us.

3 One test only at the same time. The next project can be only carried out after the current test is completed. In addition, we can provide multi-functional customized test solutions according to user requirements.

4 Standard load-bearing upper limit of turntable is 40kg, but also can be customized per requirements.

5 Please inform in advance if the voltage(220V) does not match the actual needs so that we can provide customized solutions for you.

6 At present, only Chinese and English interfaces are supported; if other languages are introduced, the software can be updated remotely.


7 It is recommended to set the test time according to the test standard. The water temperature will rise due to long time test which has an impact on the test results.

8 The standard model is adjusted by a flowmeter, and the upper surface of the float is aligned with the scale to read the data; if you need to export the test data, you can choose a flow sensor.

9 This distance is the range from the nozzle to the center of the turntable. If the user wants to extend the spraying distance, he needs to explain in advance.

10 The photos may not match the actual ones, and are for user reference only.

Product detail image:

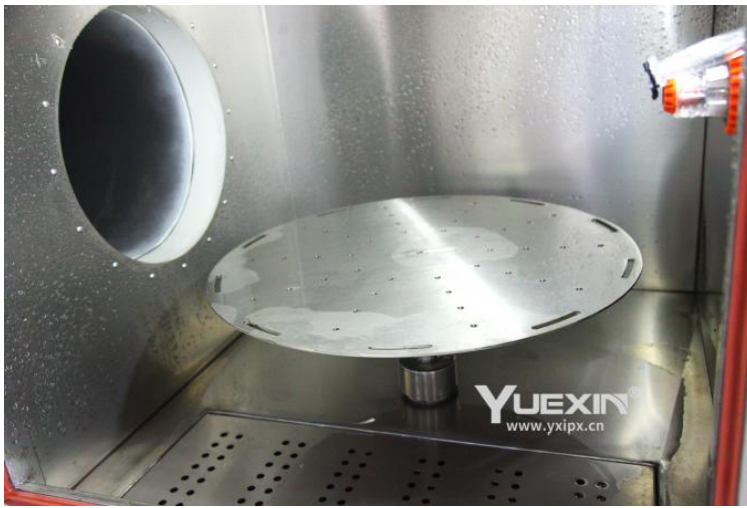

inner box

Tags: Rain Test Equipment , IPX5 IPX6 Test Chamber ,Water Jet Test Chamber for IPX5 IPX6



Guangzhou Yuexin Test Equipment Co., Ltd.



18122303372



mft@yxipx.com



raintestchambers.com

101, No.3, Jiangjunzi Road, Dalong Street, Panyu District, Guangzhou City China